


C042478 - R.02

4.2K - 5.2K


	Rear Weight	Rated Operating Capacity*			⚠ Tipping Load ⚠		
		1	2	3	1	2	3
							
	0 kg	594 kg 1309 lbs	458 kg 1010 lbs	298 kg 658 lbs	742 kg 1636 lbs	573 kg 1263 lbs	373 kg 822 lbs
	180 kg 400 lbs	903 kg 1991 lbs	677 kg 1492 lbs	440 kg 970 lbs	1129 kg 2489 lbs	846 kg 1865 lbs	550 kg 1212 lbs
	260 kg 570 lbs	957 kg 2110 lbs	707 kg 1559 lbs	466 kg 1027 lbs	1197 kg 2639 lbs	897 kg 1978 lbs	583 kg 1285 lbs
	0 kg	505 kg 1113 lbs	390 kg 859 lbs	254 kg 559 lbs	631 kg 1391 lbs	487 kg 1074 lbs	317 kg 699 lbs
	180 kg 400 lbs	768 kg 1693 lbs	575 kg 1268 lbs	374 kg 825 lbs	960 kg 2116 lbs	719 kg 1585 lbs	468 kg 1032 lbs
	260 kg 570 lbs	814 kg 1795 lbs	610 kg 1345 lbs	396 kg 873 lbs	1018 kg 2244 lbs	762 kg 1680 lbs	496 kg 1093 lbs



REFER TO THE OPERATOR MANUAL FOR THE COMPREHENSIVE LOAD DIAGRAM. THE INDICATED VALUES INCLUDE THE WEIGHT OF THE ASSEMBLED PALLET FORK, SO THE NET VALUE IS THE VALUE SHOWN IN THE TABLE MINUS THE WEIGHT OF THE PALLET FORK.

* EN 474-3:2006 + A1:2009 - FORK APPLICATION

(¹) HYDRAULIC LIMIT

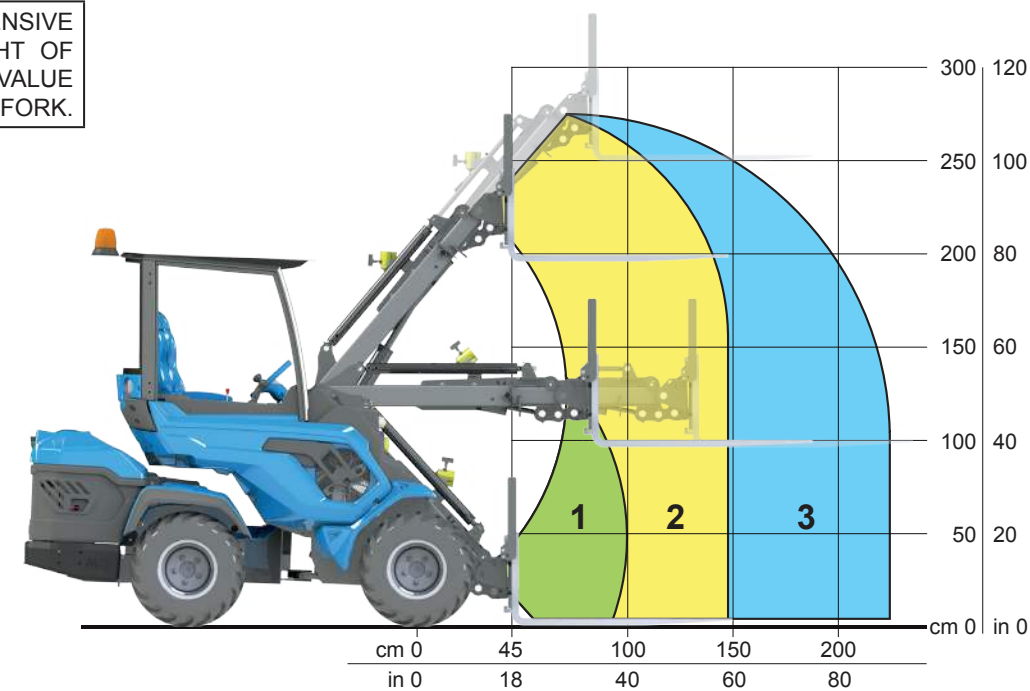

MULTI 1 ONE