



6 SERIES

	Rear Weight	Rated Operating Capacity*			⚠ Tipping Load ⚠		
		1	2	3	1	2	3
							
	0 kg	760 kg 1675 lbs	600 kg 1322 lbs	392 kg 864 lbs	950 kg 2094 lbs	750 kg 1653 lbs	490 kg 1080 lbs
	180 kg 400 lbs	960 kg 2116 lbs	760 kg 1675 lbs	496 kg 1093 lbs	1200 kg 2645 lbs	950 kg 2094 lbs	620 kg 1367 lbs
	340 kg 750 lbs	1104 kg 2434 lbs	874 kg 1927 lbs	570 kg 1258 lbs	1380 kg 3042 lbs	1093 kg 2409 lbs	713 kg 1572 lbs
	0 kg	648 kg 1428 lbs	400 kg 882 lbs	240 kg 529 lbs	810 kg 1786 lbs	500 kg 1102 lbs	300 kg 661 lbs
	180 kg 400 lbs	856 kg 1887 lbs	568 kg 1252 lbs	368 kg 811 lbs	1070 kg 2359 lbs	710 kg 1565 lbs	460 kg 1014 lbs
	340 kg 750 lbs	984 kg 2170 lbs	653 kg 1440 lbs	423 kg 933 lbs	1231 kg 2713 lbs	817 kg 1800 lbs	529 kg 1166 lbs



REFER TO THE OPERATOR MANUAL FOR THE COMPREHENSIVE LOAD DIAGRAM. THE INDICATED VALUES INCLUDE THE WEIGHT OF THE ASSEMBLED PALLET FORK, SO THE NET VALUE IS THE VALUE SHOWN IN THE TABLE MINUS THE WEIGHT OF THE PALLET FORK.

* EN 474-3:2006 + A1:2009 - FORK APPLICATION

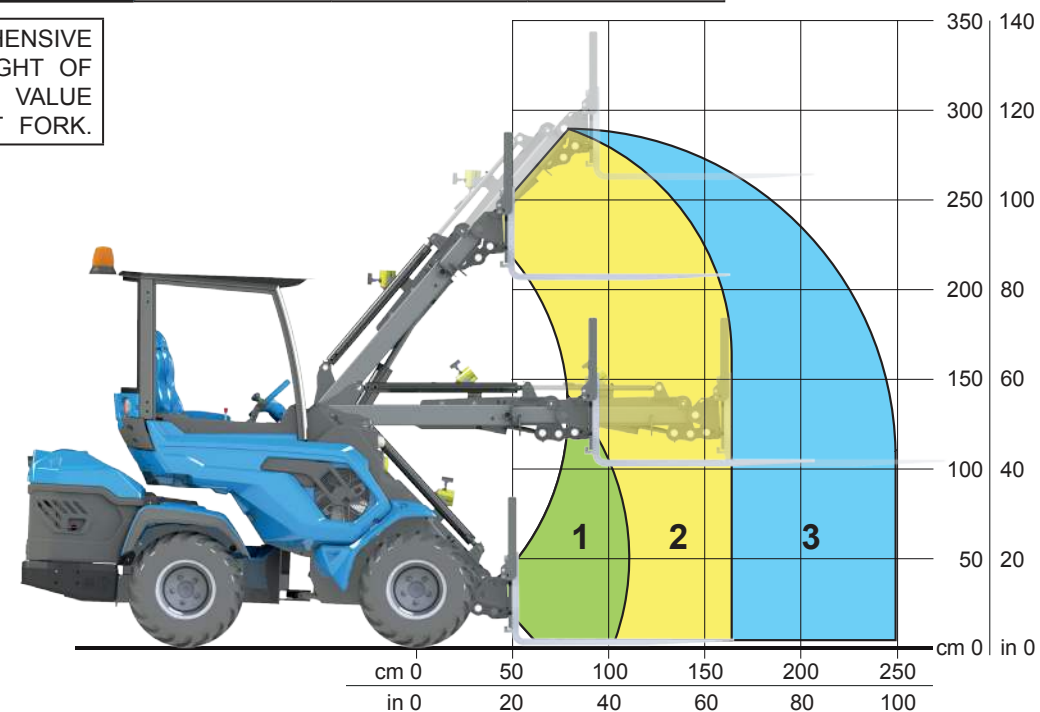

MULTI1NE