


C042506 - R01


7.2K

	Rear Weight	Rated Operating Capacity*			⚠ Tipping Load ⚠		
		1	2	3	1	2	3
							
	0 kg	1008 kg 2222 lbs	750 kg 1653 lbs	486 kg 1071 lbs	1260 kg 2778 lbs	936 kg 2064 lbs	608 kg 1340 lbs
	180 kg 400 lbs	1210 kg 2668 lbs	966 kg 2130 lbs	628 kg 1384 lbs	1512 kg 3333 lbs	1207 kg 2661 lbs	785 kg 1731 lbs
	340 kg 750 lbs	1399 kg 3084 lbs	1137 kg 2507 lbs	739 kg 1629 bs	1749 kg 3856 lbs	1421 kg 3133 lbs	924 kg 2037 lbs
	0 kg	806 kg 1777 lbs	599 kg 1320 lbs	390 kg 860 lbs	1008 kg 2222 lbs	749 kg 1651 lbs	487 kg 1073 lbs
	180 kg 400 lbs	907 kg 2000 lbs	724 kg 1596 lbs	470 kg 1036 lbs	1134 kg 2500 lbs	905 kg 1995 lbs	588 kg 1296 lbs
	340 kg 750 lbs	980 kg 2161 lbs	796 kg 1755 lbs	518 kg 1142 lbs	1225 kg 2701 lbs	995 kg 2194 lbs	647 kg 1426 lbs



REFER TO THE OPERATOR MANUAL FOR THE COMPREHENSIVE LOAD DIAGRAM. THE INDICATED VALUES INCLUDE THE WEIGHT OF THE ASSEMBLED PALLET FORK, SO THE NET VALUE IS THE VALUE SHOWN IN THE TABLE MINUS THE WEIGHT OF THE PALLET FORK.

* EN 474-3:2006 + A1:2009 - FORK APPLICATION

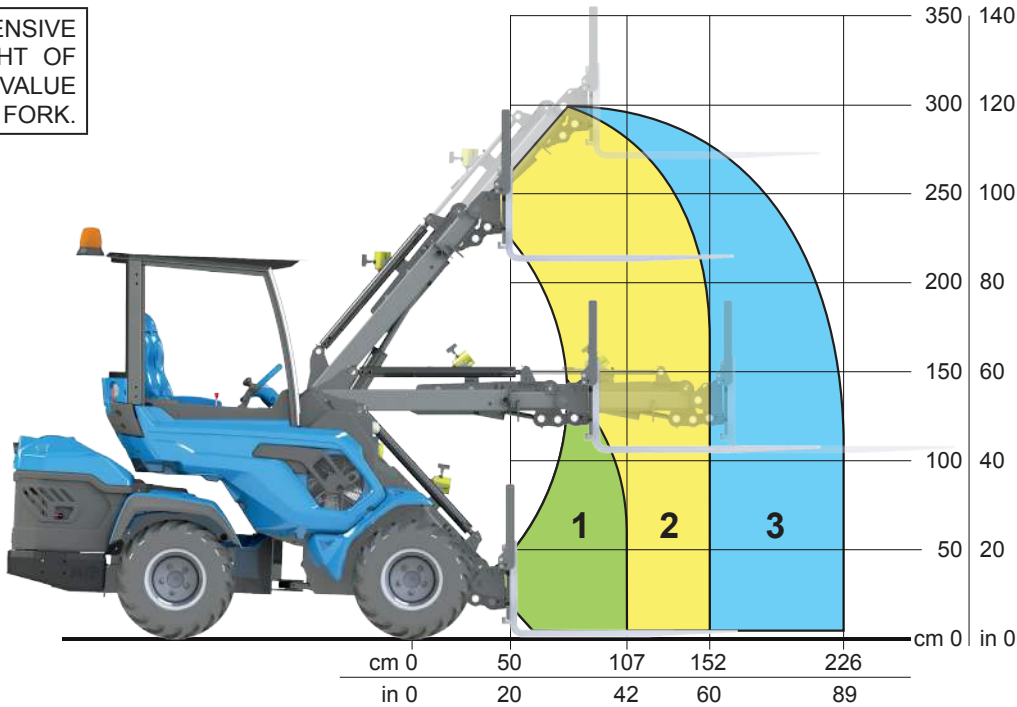

MULTI1NE