

C042519 - R.00

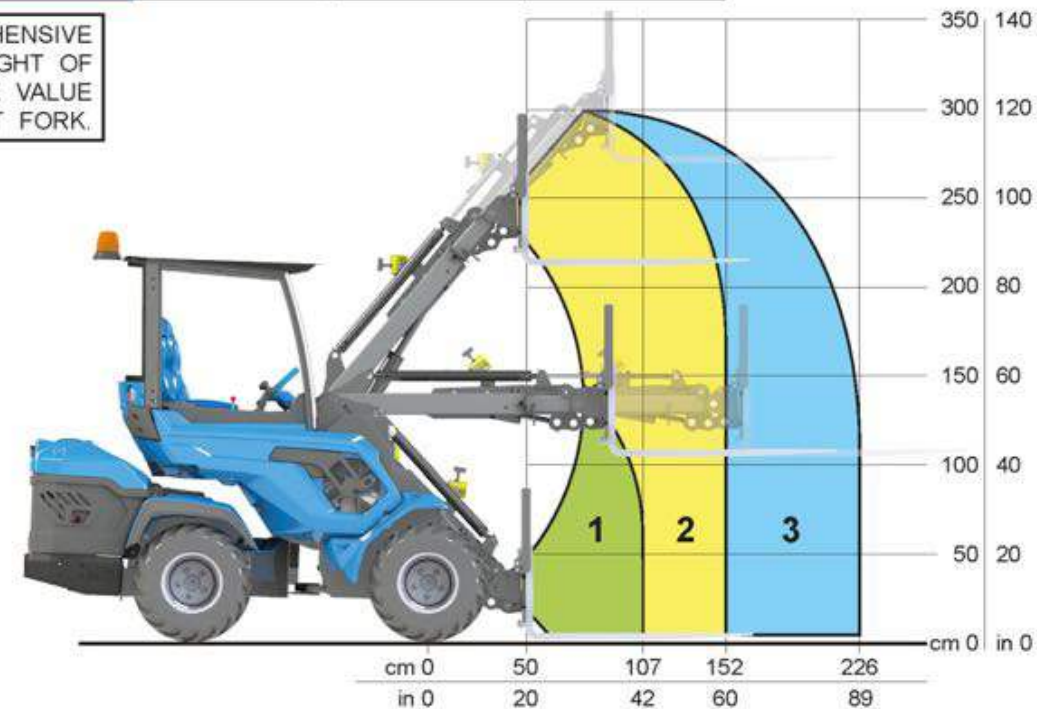
7.3Sk
8.4Sk

	Rear Weight	Rated Operating Capacity*			⚠ Tipping Load ⚠		
		1	2	3	1	2	3
							
	0 kg	1072 kg 2363 lbs	797 kg 1757 lbs	518 kg 1142 lbs	1340 kg 2954 lbs	996 kg 2196 lbs	647 kg 1426 lbs
	180 kg 400 lbs	1286 kg 2835 lbs	1027 kg 2264 lbs	668 kg 1473 lbs	1608 kg 3545 lbs	1284 kg 2831 lbs	835 kg 1841 lbs
	340 kg 750 lbs	1489 kg 3283 lbs	1210 kg 2668 lbs	786 kg 1733 bs	1861 kg 4103 lbs	1512 kg 3333 lbs	983 kg 2167 lbs
	0 kg	858 kg 1892 lbs	638 kg 1407 lbs	414 kg 913 lbs	1072 kg 2363 lbs	797 kg 1757 lbs	518 kg 1142 lbs
	180 kg 400 lbs	965 kg 2127 lbs	770 kg 1698 lbs	501 kg 1105 lbs	1206 kg 2659 lbs	963 kg 2123 lbs	626 kg 1380 lbs
	340 kg 750 lbs	1042 kg 2297 lbs	846 kg 1865 lbs	550 kg 1213 lbs	1303 kg 2873 lbs	1058 kg 2332 lbs	688 kg 1517 lbs



REFER TO THE OPERATOR MANUAL FOR THE COMPREHENSIVE LOAD DIAGRAM. THE INDICATED VALUES INCLUDE THE WEIGHT OF THE ASSEMBLED PALLET FORK, SO THE NET VALUE IS THE VALUE SHOWN IN THE TABLE MINUS THE WEIGHT OF THE PALLET FORK.

* EN 474-3:2006 + A1:2009 - FORK APPLICATION


MULTI1NE